

DH-IPC-HFW8301E-Z

3Megapixel Full HD WDR Smart Network Motorized IR Camera



Features

- 1/3" 3Megapixel progressive scan Aptina CMOS
- Support H.264/MJPEG dual codec
- Smart triple streams supported
- Max 25/30fps@3MP(2048x1536)
- Ultra WDR (Wide Dynamic Range) up to 120dB
- Ultra 3D DNR
- Ultra Defog, ROI, EIS
- Smart IR technology
- Smart detection:
 - Face detection
 - Tripwire detection
 - Intrusion detection
 - Scene change detection
- 3 ~9mm varifocal motorized lens
- Max. IR LEDs length 30m
- Micro SD memory, IP66, PoE,

DH-IPC-HFW8301E-Z

Technical Specifications


Model	DH-IPC-HFW8301EP-Z		DH-IPC-HFW8301EN-Z	
Camera				
Image Sensor	1/3" 3Megapixel Aptina CMOS			
Effective Pixels	2048(H)x1536(V)			
Scanning System	Progressive			
Electronic Shutter Speed	Auto/Manual, 1/3~1/10000s		Auto/Manual, 1/4~1/10000s	
Min. Illumination	0. 01Lux/F1.4(Color), 0Lux/F1.4(IR on)			
S/N Ratio	More than 50dB			
Video Output	1 port			
Camera Features				
Max. IR LEDs Length	30m			
Day/Night	Auto(ICR)/Color/B/W			
Backlight Compensation	BLC / HLC / WDR(120dB)			
White Balance	Auto/Manual			
Gain Control	Auto/Manual			
Noise Reduction	3D			
Privacy Masking	Up to 4 areas			
Lens				
Focal Length	3 -9mm motorized			
Max Aperture	F1.4			
Focus Control	Auto			
Angle of View	H: 86.5°(Wide)~28.6°(Tele)			
Lens Type	Motorized /Auto Iris(DC)			
Mount Type	Board-in Type			
Video				
Compression	H.264/MJPEG			
Resolution	3M(2048×1536)/1080P(1920×1080)/720P(1280×720) /D1(704×576) /CIF(352×288)			
Frame Rate	Main Stream	3M/1080P (1~25/30fps)		
	Sub Stream	D1/CIF(1 ~ 25/30fps)		
Bit Rate	H.264: 48K ~ 8192Kbps			
Audio				
Compression	G.711a / G.711u/ PCM			
Interface	1/1 channel In/Out			
Smart Function				
Smart detection	Tripwire			
	Intrusion			
	Scene change			
	Missing/Abandoned			
	Audio detect			
	Face detect			

DH-IPC-HFW8301E-Z


Network	
Ethernet	RJ-45 (10/100/1000Base-T)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
ONVIF	ONVIF,PSIA,CGI
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD, Max 64GB
Alarm	1/1 channel In/Out
General	
Power Supply	DC12V(AC24V optional), PoE (802.3af)
Power Consumption	<9W(IR on: +3W)
Working Environment	-30°C~+60°C, Less than 95% RH
Ingress Protection	IP66
Dimensions	273.3mm × 94.8mm× 94.8mm
Weight	1.3kg

DH-IPC-HFW8301E-Z

Dimensions (mm)

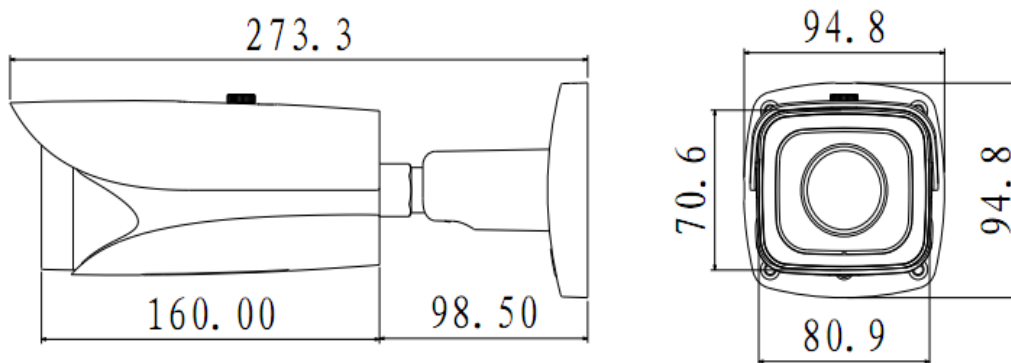

Accessory (optional)

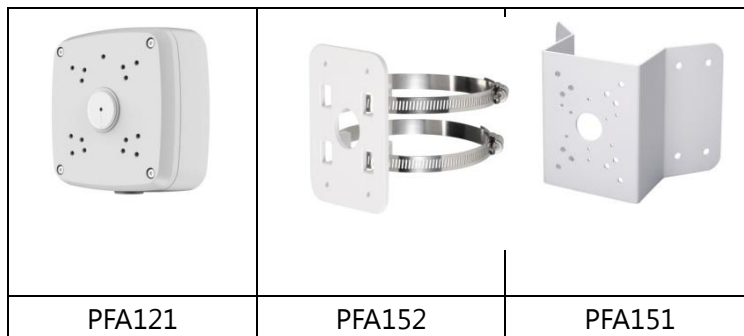

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.